


**Description :**

Chlorine free coated, transparent printing and lamination high barrier BOPET film

**Features and Applications :**

- \* For general packaging applications requiring barrier property (potato chips, coffee, snacks, cookie packaging etc.)
- \* Excellent stiffness
- \* High oxygen barrier.
- \* Recommended shelf life is 1 year for excellent corona level and excellent adhesion.

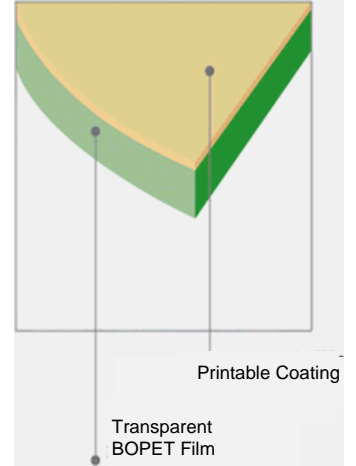

**Available Gauge (µm) :** 13

Properties	Unit	Technical Values	Test Method
<b>Thickness</b>	µm	13	ASTM D 2673
<b>Yield</b>	m2/kg	55,34	ASTM D 2578
<b>Surface Tension</b>	dyne/cm F	=>40	ASTM D 2673
<b>Tensile Strength at Break</b>	kg/mm2 MD	22	ASTM D 882
	kg/mm2 TD	25	
<b>Elongation</b>	% MD	120	ASTM D 882
	% TD	110	
<b>Haze</b>	%	=< 5	ASTM D 1003
<b>OTR (23C, 0%RH)</b>	cm3/m2/24h	1,5	ASTM D 3985
<b>WVTR (38C, 90%RH)</b>	gr/m2/24h	50	ASTM F 1249

F: Front (PVOH) - B: Back

This film complies with the EC and FDA food contact regulations. Detailed documentation is available on your request. All the information contained in this datasheet is supplied at the best of our knowledge and must not be construed as a guarantee. Since the circumstances and processes used in the application of our product are beyond our control, our guarantee remains within the limits of the generic conditions of supply of the product itself. Business Development and Customer Solutions Department is available to supply upon request all the updated recommendations relevant to the best converting and processing techniques for the product. Also, different film thicknesses and properties are available upon request.



**Tarih :** 15.03.2026

Main Plant : Organize Sanayi Bölgesi, Manisa 45030 - Tel : +90 236 226 22 00 (pbx) Fax : +90 236 233 25 25 e-mail : info@polinas.com.tr

Istanbul Office : Kısıklı Mah., Alemdag Cad. No:60 Masaldan İş Merkezi, F Blok Kat:1, 34692 Üsküdar / İstanbul 34692 - Tel: +90 850 209 19 00 Fax: +90 236 233 25 25

<http://www.polinas.com>