



Polinas

BOPP FILMS

POLINEX®

114VWH


Description :

Transparent, both sides heat sealable (one side LTS) co-extruded BOPP film for food & confectionery packaging

Features and applications :

- * One side corona treated
- * Untreated side for low heat sealing
- * Suitable for single ply & lamination applications
- * Excellent gloss and clarity
- * Excellent hot tack and sealing strength
- * Excellent ink adhesion with flexographic and rotogravure
- * Very good sealing strength, excellent machinability on high speed packaging machines (particularly for cylindrical packages)

Available gauge(s) (µm) : 20,25

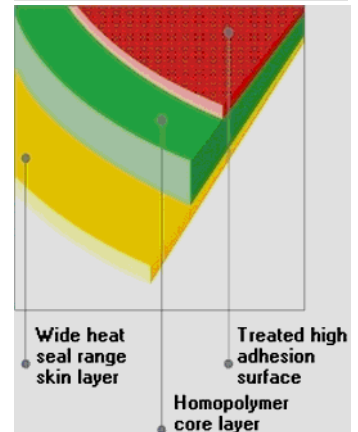

Properties	Unit	Technical Values		Test Method
Thickness	µm	20	25	ASTM D 2673
Yield	m2/kg	55	44	ASTM D 2673
Haze	%	2,7	2,7	ASTM D 1003
Gloss	% F	90	90	ASTM D 2457
Dimensional stability	% MD	-4	-4	ASTM D 1204
	% TD	-2	-2	
Tensile strength at break	kg/mm ² MD	14	14	ASTM D 882
	kg/mm ² TD	30	30	
Elongation	% MD	175	190	ASTM D 882
	% TD	50	50	
Surface tension	dyne/cm F	>= 36	>= 36	ASTM D 2578
C.O.F	BB	=< 0,3	=< 0,3	ASTM D 1894
OTR (23C, 0%RH)	cm3/m2/24h	1.600	1.600	ASTM D 3985
WVTR (38C, 90%RH)	gr/m2/24h	5	5	ASTM F 1249
Heat-seal temperature	°C FB	115	115	POLINAS
Heat seal temperature	°C *BB	75	75	POLINAS

F: Front - B: Back - *220 N, 1 sec, 200 g/25mm

This film complies with the EC and FDA food contact regulations. Detailed documentation is available on your request.

All the information contained in this datasheet is supplied at the best of our knowledge and must not be construed as a guarantee. Since the circumstances and processes used in the application of our product are beyond our control, our guarantee remains within the limits of the generic conditions of supply of the product itself. Business Development and Customer Solutions Department is available to supply upon request all the updated recommendations relevant to the best converting and processing techniques for the product. Also, different film thicknesses and properties are available upon request.



Date : 13.02.2021

Main Plant : Organize Sanayi Bölgesi, Manisa 45030 - Tel : +90 236 226 22 00 (pbx) Fax : +90 236 233 25 25 e-mail : info@polinas.com.tr

Istanbul Office : Kısıklı Mah., Alemda Cad. No:60 Masaldan Merkezi, F Blok Kat:1, 34692 Üsküdar / İstanbul 34692 - Tel: +90 850 209 19 00 Fax: +90 236 233 25 25

<http://www.polinax.com>